



915-007.058
PATENT

PCT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: QIN ZHENGDI

Serial No.: 0 / 10/727,152

Group No.:

Filed: 12/2/03

Examiner:

For: Determination of the Position of a Pulse Peak

Commissioner of Patents and Trademarks

Washington, D.C. 20231

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country : International Bureau

Application Number : PCT/IB02/05059

Filing Date : 02 December 2002

Reg. No. 31,391

Tel. No. (203) 261-1234

Francis J. Maguire
SIGNATURE OF ATTORNEY

Francis J. Maguire

Type or print name of attorney

WARE, FRESSOLA, VAN DER SLUYS & ADOLPHSON

P.O. Address

755 Main Street, PO Box 224
Monroe CT 06468

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent if the foreign application is referred to in the oath or declaration as required by § 1.63.

CERTIFICATE OF MAILING (37 CFR 1.8a).

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to the: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Date: Dec. 24, 2003

Margery B. Hood

(Type or print name of person mailing paper)

Margery B. Hood
(Signature of person mailing paper)

(Transmittal of Certified Copy [5-4])



**WORLD INTELLECTUAL PROPERTY ORGANIZATION
ORGANISATION MONDIALE DE LA PROPRIÉTÉ INTELLECTUELLE**

34, chemin des Colombettes, Case postale 18, CH-1211 Genève 20 (Suisse)
Téléphone: (41 22) 338 91 11 - e-mail: wipo.mail @ wipo.int. - Fac-similé: (41 22) 733 54 28

**PATENT COOPERATION TREATY (PCT)
TRAITÉ DE COOPÉRATION EN MATIÈRE DE BREVETS (PCT)**

**CERTIFIED COPY OF THE INTERNATIONAL APPLICATION AS FILED
AND OF ANY CORRECTIONS THERETO**

**COPIE CERTIFIÉE CONFORME DE LA DEMANDE INTERNATIONALE, TELLE QU'ELLE
A ÉTÉ DÉPOSÉE, AINSI QUE DE TOUTES CORRECTIONS Y RELATIVES**

International Application No. }
Demande internationale n° } **PCT/IB02/05059**


International Filing Date } **02 December 2002**
Date du dépôt international } **(02.12.02)**

Geneva/Genève,

**26 November 2003
(26.11.03)**

**International Bureau of the
World Intellectual Property Organization (WIPO)**

**Bureau International de l'Organisation Mondiale
de la Propriété Intellectuelle (OMPI)**

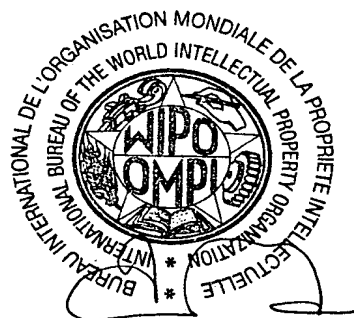

J.-L. Baron

**Head, PCT Receiving Office Section
Chef de la section "office récepteur du PCT"**

korab

Per Telefax**PCT REQUEST**

Original (for SUBMISSION) - printed on 02.12.2002 04:20:14 PM

020922WO

0	For receiving Office use only	
0-1	International Application No.	PCT, 3 - 2 1 0 5 0 5 9
0-2	International Filing Date	02 DECEMBER 2002 (02.12.02)
0-3	Name of receiving Office and "PCT International Application"	INTERNATIONAL BUREAU OF WIPO PCT International Application
0-4	Form - PCT/RO/101 PCT Request	
0-4-1	Prepared using	PCT-EASY Version 2.92 (updated 01.06.2002)
0-5	Petition	
	The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	International Bureau of the World Intellectual Property Organization (RO/IB)
0-7	Applicant's or agent's file reference	020922WO
I	Title of invention	DETERMINATION OF THE POSITION OF A PULSE PEAK
II	Applicant	
II-1	This person is:	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	NOKIA CORPORATION
II-5	Address:	Keilalahdentie 4 FIN-02150 Espoo Finland
II-6	State of nationality	FI
II-7	State of residence	FI
III-1	Applicant and/or inventor	
III-1-1	This person is:	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	ZHENGDI, Qin
III-1-5	Address:	Ritalankatu 24 FIN-33400 Tampere Finland
III-1-6	State of nationality	FI
III-1-7	State of residence	FI

PCT REQUEST

2/4

Original (for SUBMISSION) - printed on 02.12.2002 04:20:14 PM

020922WO

IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name	COHAUSZ & FLORACK (24)
IV-1-2	Address:	Kanzlerstr. 8a D-40472 Düsseldorf Germany
IV-1-3	Telephone No.	+49-211-904900
IV-1-4	Facsimile No.	+49-211-9049049
IV-1-5	e-mail	mail@cohausz-florack.de
V	Designation of States	
V-1	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW MZ SD SL SZ TZ UG ZM ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE BG CH&LI CY CZ DE DK EE ES FI FR GB GR IE IT LU MC NL PT SE SK TR and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GQ GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT
V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AG AL AM AT AU AZ BA BB BG BR BY BZ CA CH&LI CN CO CR CU CZ DE DK DM DZ EC EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MA MD MG MK MN MW MX MZ NO NZ OM PH PL PT RO RU SD SE SG SI SK SL TJ TM TN TR TT TZ UA UG US UZ VC VN YU ZA ZM ZW

PCT REQUEST

3/4

Original (for SUBMISSION) - printed on 02.12.2002 04:20:14 PM

020922WO


V-5	Precautionary Designation Statement		
	In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit.		
V-6	Exclusion(s) from precautionary designations	NONE	
VI	Priority claim	NONE	
VII-1	International Searching Authority Chosen	European Patent Office (EPO) (ISA/EP)	
VIII	Declarations	Number of declarations	
VIII-1	Declaration as to the identity of the inventor	-	
VIII-2	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	-	
VIII-3	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	-	
VIII-4	Declaration of inventorship (only for the purposes of the designation of the United States of America)	-	
VIII-5	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	-	
IX	Check list	number of sheets	electronic file(s) attached
IX-1	Request (including declaration sheets)	4	-
IX-2	Description	15	-
IX-3	Claims	4	-
IX-4	Abstract	1	EZABST00.TXT
IX-5	Drawings	4	-
IX-7	TOTAL	28	
	Accompanying items	paper document(s) attached	electronic file(s) attached
IX-8	Fee calculation sheet	✓	-
IX-17	PCT-EASY diskette	-	Diskette
IX-19	Figure of the drawings which should accompany the abstract	1	
IX-20	Language of filing of the international application	English	

PCT REQUEST

4/4

Original (for SUBMISSION) - printed on 02.12.2002 04:20:14 PM

020922WO

X-1	Signature of applicant, agent or common representative	
X-1-1	Name	COHAUSZ & FLORACK (24)
X-1-2	Name of signatory	Dr. Ralph Schippan
X-1-3	Capacity	Patent Attorney

FOR RECEIVING OFFICE USE ONLY

10-1	Date of actual receipt of the purported international application	02 DECEMBER 2002 (02.12.02)
10-2	Drawings:	
10-2-1	Received	
10-2-2	Not received	
10-3	Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application	
10-4	Date of timely receipt of the required corrections under PCT Article 11(2)	
10-5	International Searching Authority	ISA/EP
10-6	Transmittal of search copy delayed until search fee is paid	

FOR INTERNATIONAL BUREAU USE ONLY

11-1	Date of receipt of the record copy by the International Bureau	
------	--	--

WY/d1 020922WO
December 2, 2002

Determination of the position of a pulse peak

FIELD OF THE INVENTION

The invention relates to a method for determining the position of the peak of a pulse in a signal received at a receiver. The invention relates equally to a device and to a cellular communication system which realize this method.

BACKGROUND OF THE INVENTION

The position of the peak of a pulse in a received signal can be required for example for determining the delay of the signal when propagating from a transmitting unit to the receiver.

The delay of signals at a receiver can be evaluated for instance by a location service for determining the current location of the receiver. In case of a line-of-sight transmission, the delay of a signal is directly dependent on the distance between the receiver and the respective transmitting unit.

Such a location service can be provided in particular by a CDMA (code division multiple access) based satellite positioning system or by a CDMA based terrestrial cellular positioning system. In a CDMA based system, a data sequence is used by a transmitting unit to modulate a sinusoidal carrier, and then the bandwidth of the resulting signal is spread to a larger value, e.g. by multiplying the modulated signal with pseudo-random bits

- 2 -

derived from a CDMA spreading code. These bits are usually referred to as chips.

In a CDMA system, the searching procedure performed for detecting a delayed signal taking the shortest propagation path is normally carried out in the impulse response of signals received from different transmitting units. The delay can be estimated e.g. by an edge detection in the impulse response profile of the received signals. The length of the impulse response profile is much longer than the width of the signal shape. Therefore, the search for an edge is performed along the impulse response, started from a certain position of the signal by comparing the amplitude of sampling data with a pre-defined threshold. The edge detection is thus a hitting process. The threshold has to be set on the one hand high enough in order to avoid that a noise peak is detected as signal edge, which would result in a false alarm. On the other hand, the threshold has to be set low enough to guarantee that the signal edge is detected even if the signal strength is rather weak.

The delay of a signal can only be determined accurately, when the exact position of the peak of a signal pulse is known, since this is the only clear reference point in the pulse. The result of the hitting process, however, is usually a position on the left side of the signal peak, i.e. on the side which is closer to a delay of zero, since a pulse will usually be detected before its peak is reached. Thus, the error of the edge detection is negatively biased. The error is more related to the signal than to the SNR (signal-to-noise ratio), which means that the variance can be high. The hit will occur

- 3 -

between close to the peak of the pulse for weak signals and close to the bottom of the pulse for strong signals.

In case of a sampling rate of 2 samples per chip, the delay estimation error can therefore range from 0.0 chips to -1.0 chips. The average error is then about -0.5 chip for a triangular shape or waveform of the pulse.

Since the error has a negative bias, the simplest way to reduce the error is to introduce a positive factor to compensate for the bias. If the signal level is higher, the error is also bigger. Therefore, the compensation factor should be adaptive to the signal level. Still, with such a general compensation, a significant average error remains.

SUMMARY OF THE INVENTION

It is an object of the invention to improve the accuracy of the determined position of the peak of a pulse.

This object is reached according to the invention with a method for determining the position of a peak of a pulse in a signal received at a receiver, which method comprises as a first step taking samples of the received signal. In a next step, at least three samples are determined, of which at least one has a signal strength exceeding a threshold value. The samples can, but do not have to be consecutive. Then, the position of the pulse peak is determined based on an interpolation of at least two of the determined samples. These at least two samples are selected based on the signal strengths of the at least three determined samples. It is further proposed

- 4 -

that the interpolation includes an evaluation of the signal strength of the at least two samples.

The object of the invention is moreover reached with a device comprising means for realizing the proposed method. The device can be for example the receiver, i.e. the receiver itself computes the position of received pulse peaks. Alternatively, the device can be external to the receiver. In this case, the receiver has to provide information on received signals to this device, in order to enable the device to perform the proposed processing. In case the receiver is a mobile terminal or integrated in a mobile terminal, such an external device can be in particular a network element of a cellular communication network. Finally, the object of the invention is reached with a cellular communication system comprising the proposed device.

The invention proceeds from the idea that the position of a pulse peak can be determined more accurately, if the position is not determined simply by an edge detection searching for a single sample which exceeds a threshold value, but by an interpolation of at least two samples, of which at least one exceeds a threshold value. The proposed interpolation evaluates the signal strengths of the samples used for the interpolation, thereby taking account of the difference in the distance of the samples from the peak of the pulse. In addition, the at least two samples can be selected in most cases such that they can be assumed to lie advantageously on opposite sides of the pulse peak, if the signal strength from an appropriate number of samples is taken into account.

- 5 -

It is an advantage of the invention that the estimation accuracy of the position of the peak is increased. Thereby, e.g. the delay of received signals can be estimated more accurately.

Preferred embodiments of the invention become apparent from the dependent claims.

Advantageously, the equations for the interpolation are selected based on the employed model of the pulse shape. For example, in case the model of the pulse shape is a triangle, a linear relation between the distance of the samples to the peak position and the signal strengths of the samples can be assumed for the interpolation.

A model of the pulse shape which has a triangular shape results in a particularly simple approach. Even though in practice the real pulse shape will usually not correspond to a triangle, the triangle approach leads to quite accurate peak position estimates for other band-limited signal pulse shapes as well. While different pulse shapes have a different behavior in the delay estimation, the interpolation itself is a shape-fitting procedure.

In order to compensate in addition for the differences between the selected model and the real pulse shape, either the samples used in the interpolation can be weighted with different weighting coefficients or the resulting estimate can be adjusted. The compensation can be based on known deviations between the model of the pulse shape and the real pulse shape and/or on the signal strength of samples.

- 6 -

Preferably, the method according to the invention differentiates between different situations that may occur. Thereby, the optimal samples can be selected for the interpolation in each situation. With such a differentiation, the method according to the invention is also suited to deal with multipath propagation of signals. The differentiation can be based in particular on the differences in the successions of the signal strengths of the considered samples.

The invention can be employed e.g. for supporting the acquisition of signals, for instance in any kind of location service.

It can be used in particular, though not exclusively, for determining the delay of signals in a satellite positioning system or in a cellular positioning system. The satellite positioning system can be for instance GPS (global positioning system) or Galileo, while the cellular positioning system can be implemented for example in a 3G (3rd generation) communication system, like a GSM (global system for mobile communications), CDMA and/or GPRS (general packet radio system) system.

BRIEF DESCRIPTION OF THE FIGURES

Other objects, features and advantages of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings, wherein

Fig. 1 is a flow chart illustrating an embodiment of the method according to the invention;

- 7 -

- Fig. 2 shows an exemplary model of a pulse shape employed in the method of figure 1;
- Fig. 3 illustrates a first situation dealt with in the method of figure 1;
- Fig. 4 illustrates a second situation in the method of figure 1;
- Fig. 5 illustrates a third situation in the method of figure 1; and
- Fig. 6 shows an exemplary real pulse shape together with a model of a pulse shape.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is a flow chart which illustrates a first embodiment of the method according to the invention, which is implemented in an exemplary CDMA system. The CDMA system comprises a plurality of base stations of a cellular communication network and a mobile station which is able to communicate via the air interface with these base stations. The method is used for estimating at the mobile station the delay of signals received from some of the base stations, in order to determine the current position of the mobile station.

For the method of figure 1, the pulse shape in the impulse response of a received CDMA signal, which has passed a matched filter, is supposed to be triangular and is thus also modeled to be triangular. The triangular model is depicted in figure 2. The triangle 21 is isosceles and has a duration of 2 chips, since the coverage of a peak in a CDMA system is 2 chips.

In a first step in the method of figure 1, samples are taken at the mobile station from the impulse response

- 8 -

with a sampling rate of two samples per chip. Obviously, a sampling rate of more than two samples per chip could be used as well. In this case, however, the equations presented in the following would have to be adjusted accordingly.

The taken samples are then compared to a predetermined threshold value, starting at a position which corresponds to a delay of zero. The threshold value is selected such that the false alarm rate is below a desired value, while it is ensured at the same time that a real peak is detected with a desired probability. The threshold value may be varied to this end based e.g. on the signal strength of received signals.

The first sample at a position x_0 which exceeds the threshold value is considered as a "hit", i.e. as a detection of the edge of the signal pulse in the impulse response which took the shortest propagation path.

In the following, a differentiation between three possible situations is carried out.

In case the strength $A(x_0)$ of the first sample at position x_0 is smaller than the strength $A(x_1)$ of the second sample at position x_1 , there are two possible situations.

In the first possible situation S_1 , the strength $A(x_1)$ of the second signal at position x_1 is larger than the strength $A(x_2)$ of the third signal at position x_2 . The first situation S_1 is thus give by the following set:

$$S_1 \in [A(x_0) < A(x_1)] \cap [A(x_1) \geq A(x_2)]$$

- 9 -

In the first situation, a single path has been detected, and the peak is located somewhere between position x_0 and position x_2 . In this case, the three values $A(x_0)$, $A(x_1)$ and $A(x_2)$ can be used for an interpolation to find a more accurate peak position.

An example for this situation is illustrated in figure 3. The figure is a diagram depicting the strength A of the three samples at the respective position x_0 , x_1 , x_2 of the samples. In addition, the triangular model 31 of the pulse shape is indicated with dotted lines. The signal strength of the three samples is equal to the value of the triangle at the corresponding position. It can be seen that the first sample is positioned on the left hand side of the peak 32, while the second and the third sample are located on the right hand side of the peak 32. In another example for this situation, the second sample could also be located on the left hand side of the peak. A zero delay is somewhere to the left of the triangle 31.

For the interpolation, the "early minus late" technique can be applied. With this technique, the estimated peak position x_p , and thus the delay, is given by:

$$x_1 + \frac{1}{2} \left[\frac{A(x_2) - A(x_0)}{A(x_2) + A(x_0)} \right],$$

where the unit of second term is chips.

In figure 3, the estimation of the peak position x_p resulting for the depicted example is indicated. If the signal is strong, a perfect interpolation for the delay estimation can be obtained. The error is SNR dependent.

- 10 -

In the second possible situation S_2 , in contrast, the strength $A(x_1)$ of the second signal at position x_1 is smaller than the strength $A(x_2)$ of the third signal at position x_2 . The second situation S_2 is thus give by the following set:

$$S_2 \in [A(x_0) < A(x_1)] \cap [A(x_1) < A(x_2)]$$

Such a distribution of sample strengths is indicative of a multipath propagation resulting in a so-called "fat finger". The second situation results more specifically, when a pulse transmitted by a base station propagates via several paths to the mobile station, and the first pulse arriving at the mobile station, e.g. a pulse which propagated on a line-of-sight path, is followed in an overlapping manner by a second pulse.

An example for the second situation is illustrated in figure 4. Figure 4 is again a diagram depicting the strength of the three samples at the respective position x_0 , x_1 , x_2 of the samples. Here, two overlapping triangles 41, 43, each modeling a pulse arriving at the mobile station, are indicated in addition with dotted lines. The first sample, having a signal strength of $A(x_0)$, is positioned on the left hand side of the peak 42 of the first pulse 41 at position x_0 , and the second sample, having a signal strength of $A(x_1)$, is positioned on the left hand side of the peak 42 of the first pulse 41 at position x_1 . The strength $A(x_2)$ of the subsequent third sample at position x_2 is larger than the strength $A(x_1)$ of the second sample, since it comprises a component of the second pulse 43.

- 11 -

Therefore, the value of the third sample at position x_2 is not reliable. Nevertheless, the first and the second sample can be used to reduce the inaccuracy of the first sample. The position x_p of the peak 42 of the first pulse 41 can be estimated by:

$$x_0 + \frac{1}{2} \left[\frac{A(x_1)}{A(x_1) + A(x_0)} \right],$$

where the unit of second term is chips.

For this estimation, there are two error bonds given by the two extreme cases. In the first extreme case, the position x_0 of the first sample is near the top 42 of the first triangle 41, and the maximum error caused by the lack of information on a reliable third sample is +0.25 chips. In the second extreme case, the position x_0 of the first sample is near the foot of the first triangle 41, and the maximum error caused by the lack of information on a reliable third sample is -0.25 chips.

The multipath interference may cause an additional error of +0.25 chips in the maximum, when the hit is near the top of the first path signal and the following path signal is very strong, i.e. $A(x_1) \gg A(x_0)$. This multipath error in the delay estimation is always positive.

In case the strength $A(x_0)$ of the first signal at position x_0 is not smaller than the strength $A(x_1)$ of the second signal at position x_1 , the third possible situation S_3 is given, which can be expressed by the following:

- 12 -

$$S_3 \in [A(x_0) \geq A(x_1)]$$

In this third situation, the first sample at position x_0 can be assumed to be close to the peak. Still, the first sample might not be positioned exactly at the position of the peak.

An example for the third situation is illustrated in figure 5. The figure is a diagram depicting the strength of the three samples at their positions x_0 , x_1 , x_2 . In addition, a triangular model 51 of the pulse shape is indicated again with dotted lines. It can be seen that all three samples are positioned on the right hand side of the peak 52 of the triangle 51. The third sample at position x_2 did not result in a signal strength exceeding the predetermined threshold value.

In order to obtain an information on the exact peak position x_p , it has to be ensured that information from both sides of the peak 52 is available. To this end, in addition an earlier sample at position x_{-1} is taken into account. The signal strength $A(x_{-1})$ of the preceding sample at position x_{-1} is indicated in figure 5 as well. The interpolation is then carried out between the earlier sample position x_{-1} and the second sample at position x_1 . Thereby, the situation corresponds basically to the first described situation.

As in the first situation, the "early minus late" technique can be applied for the interpolation. The estimated peak position x_p is then given by:

- 13 -

$$x_0 + \frac{1}{2} \left[\frac{A(x_1) - A(x_{-1})}{A(x_1) + A(x_{-1})} \right],$$

where the unit of second term is chips.

In the example of figure 5, the resulting estimation for the peak position x_p lies between position x_{-1} and position x_0 .

Summarized, the estimation error can be limited to a value between -0.25 and +0.25 chips with the proposed method in any situation. The multipath error may add with a maximum of +0.25 chips. There is no signal-strength dependent bias required for the estimation. The stronger the signal, the smaller the error. The averaged error can be much smaller than 0.25 chips for strong signals. This corresponds in the case of a cellular 3G network to an estimation accuracy of $\pm 20\text{m}$, if there is no multipath propagation, and of -20m to +40m in the presence of multipath propagation.

In a second embodiment of the invention, again a triangular model of the pulse shape is used, but the actual pulse shape is known to be a square-root-raised cosine pulse shape, which can be expressed by the following equation:

$$g\left(\frac{t}{T}\right) = C \frac{\cos\left[(1+\beta)\pi t/T\right] + \sin\left[(1-\beta)\pi t/T\right] (4\beta t/T)^{-1}}{1 - (4\beta t/T)^2}$$

Figure 6 shows a corresponding square-root-raised cosine pulse shape 65 with a solid line, and the triangular

- 14 -

model 61 with a dashed line. It can be seen that the differences between the two shapes 61, 65 within ± 1 chips are quite small. The error caused by the shape differences is less than 5% in this case.

In order to further improve the delay estimation, deviations of the model of the pulse shape 61 from the real pulse shape 65 are taken into account in addition to the steps described with reference to figure 1.

More specifically, the samples of which the signal strengths $A(x)$ are to be used in the interpolation are first weighted with different weighting coefficients compensating for the differences in shape, as will be explained in the following by way of example.

The situation presented in figure 6 corresponds basically to the first situation presented in figure 3. Thus, a first sample at position x_0 and a third sample at position x_2 are used for the actual interpolation. The first sample at position x_0 has a measured signal strength $A(x_0)$ which exceeds the value of the triangle 61 at this position. Thus, this strength $A(x_0)$ is weighted lower. The third sample at position x_2 , in contrast, has a measured signal strength $A(x_2)$ which is lower than the value of the triangle 61 at this position. Thus, this strength $A(x_2)$ is weighted higher. As a result, the square-root raised cosine curve is approached to the triangle curve, and the interpolation principle for the triangle can be also applied to the square-root raised cosine pulse shape.

The interpolation is then carried out as described above with reference to figure 1 with the weighted samples.

- 15 -

In a third embodiment of the method according to the invention, again a triangular model of the pulse shape is used, and the actual pulse shape is a square-root-raised cosine pulse shape as depicted in figure 6.

In this embodiment, however, the position estimate of the pulse peak is first calculated entirely as described with reference to figure 1. A compensation of the difference of shapes 61, 65 of the model and the real pulse is only carried out in a subsequent step.

For this compensation, the estimated position x_p is modified based on the amplitudes of the samples on both sides of the peak 62 of the pulse 65, and on the shape of the pulse 65. For instance, when the method described with reference to figure 1 is applied to the example of figure 6, it results in a negative error. This error can be reduced by a multiplication factor that is produced by the amplitudes of the samples at positions x_0 , x_1 and x_2 .

It is to be noted that the described embodiment constitutes only one of a variety of possible embodiments of the invention.

- 16 -

C l a i m s

1. Method for determining the position (x_p) of a peak of a pulse in a signal received at a receiver, said method comprising:
 - taking samples of said received signal;
 - determining at least three samples, of which at least one has a signal strength exceeding a threshold value; and
 - determining the position (x_p) of said pulse peak based on an interpolation of at least two of said determined samples, which at least two samples are selected based on the signal strengths of said at least three determined samples, and which interpolation includes an evaluation of the signal strength of said at least two samples.
2. Method according to claim 1, wherein different equations for said interpolation are provided for different distributions of the signal strengths of said at least three determined samples.
3. Method according to claim 1 or 2, wherein said at least two samples are selected based in addition on a model for said pulse shape (31,41,51,61).
4. Method according to one of the preceding claims, wherein equations for said interpolation are determined based on a model for said pulse shape (31,41,51,61).

- 17 -

5. Method according to claim 3 or 4, wherein said model of said pulse shape (31,41,51,61) has a triangular shape.
6. Method according to claim 5, wherein, in case the signal strength $A(x_0)$ of a determined sample at a first position x_0 is smaller than the signal strength $A(x_1)$ of a determined second sample at a following second position x_1 and the signal strength $A(x_1)$ of said second sample is larger than the signal strength $A(x_2)$ of a determined third sample at a following third position x_2 , the position of said peak is estimated to be:

$$x_1 + \frac{1}{2} \left[\frac{A(x_2) - A(x_0)}{A(x_2) + A(x_0)} \right] \text{ chips.}$$

7. Method according to claim 5 or 6, wherein said pulse has a width of about two chips, wherein said sampling rate is two samples per chip, and wherein, in case the signal strength $A(x_0)$ of a determined sample at a first position x_0 is smaller than the signal strength $A(x_1)$ of a determined second sample at a following second position x_1 and the signal strength $A(x_1)$ of said second sample is smaller than the signal strength $A(x_2)$ of a determined third sample at a following third position x_2 , the position of said peak is estimated to be:

$$x_0 + \frac{1}{2} \left[\frac{A(x_1)}{A(x_1) + A(x_0)} \right] \text{ chips.}$$

8. Method according to one of claims 6 to 7, wherein said pulse has a width of about two chips, wherein said sampling rate is two samples per chip, and

- 18 -

wherein, in case the signal strength $A(x_0)$ of a determined sample at a first position x_0 is larger than the signal strength $A(x_1)$ of a determined second sample at a following second position x_1 , the position of said peak is estimated to be:

$$x_0 + \frac{1}{2} \left[\frac{A(x_1) - A(x_{-1})}{A(x_1) + A(x_{-1})} \right] \text{ chips,}$$

wherein $A(x_{-1})$ is the signal strength of a determined third sample preceding said first sample at a third position x_{-1} .

9. Method according to one of claims 4 to 8, wherein a weighting of the signal strengths of samples used in said interpolation is performed before said interpolation based on the known deviations between said model of said pulse shape (61) and the real pulse shape (65).
10. Method according to one of claims 4 to 8, wherein a correction of a position (x_p) determined based on said interpolation is performed based on the known deviations between said model of said pulse shape (61) and the real pulse shape (65) and based on the signal strengths of said samples.
11. Method according to one of the preceding claims, wherein said at least three samples are consecutive samples.
12. Device comprising means for determining the position (x_p) of a peak of a pulse in a signal received at a receiver according to one of the preceding claims.

- 19 -

13. Device according to claim 12, wherein said device is given by said receiver.
14. Device according to claim 12, wherein said device is a device external to said receiver and comprises further means for receiving from said receiver information on said received signal.
15. Device according to claim 14, wherein said device is a network element of a cellular communication system.
16. Cellular communication system comprising a device according to one of claims 12 to 15.

- 20 -

A b s t r a c t

The invention relates to a method for determining the position x_p of a peak of a pulse in a signal received at a receiver. In order to improve the accuracy of this determination, the method comprises taking samples of said received signal, determining at least three samples, at least one of which has a signal strength exceeding a threshold value, and determining the position x_p of the pulse peak based on an interpolation of at least two of the determined samples, which at least two samples are selected based on the signal strengths of the at least three determined samples, and which interpolation includes an evaluation of the signal strength of the at least two samples. The invention relates equally to a device and to a cellular communication system comprising means for realizing this method.

For publication: Figure 1

1/4

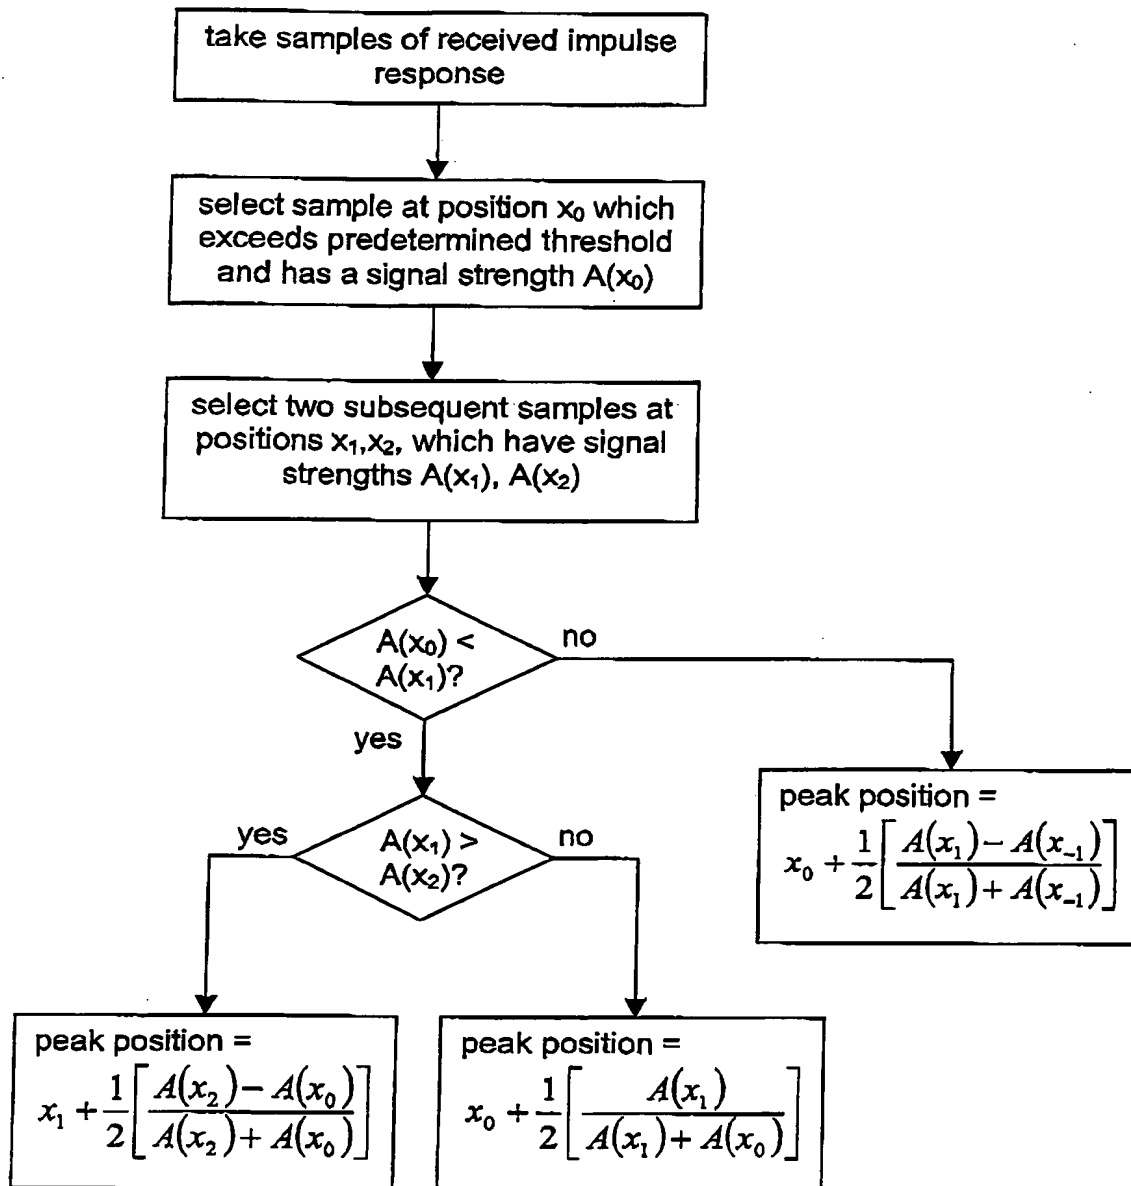
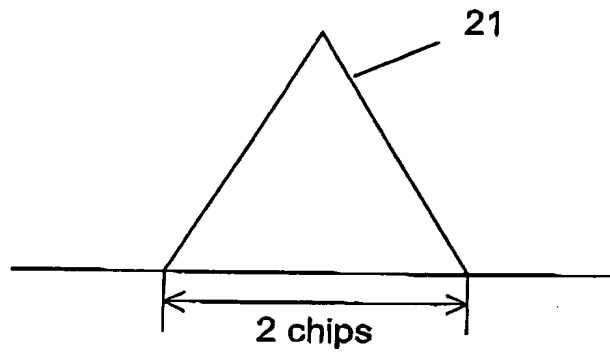
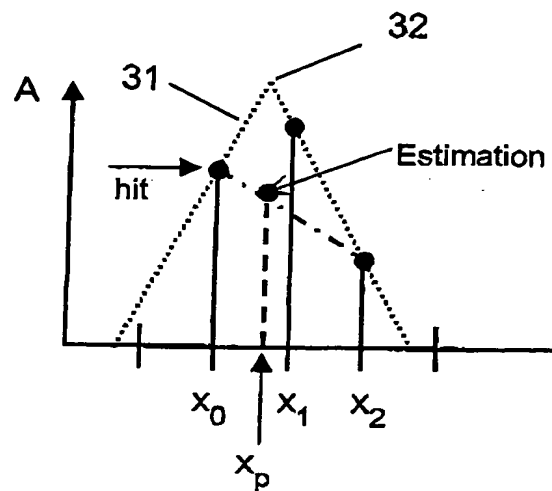
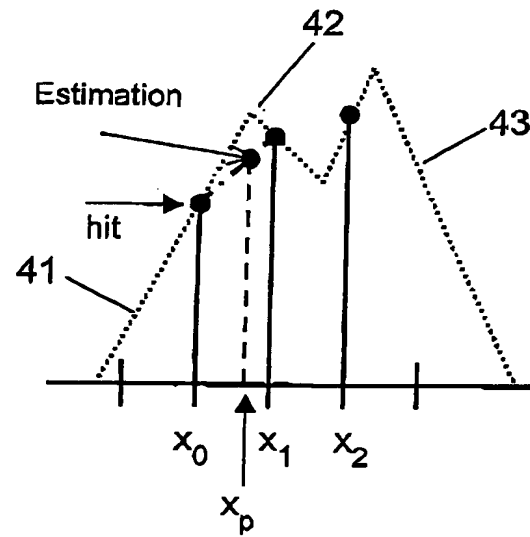
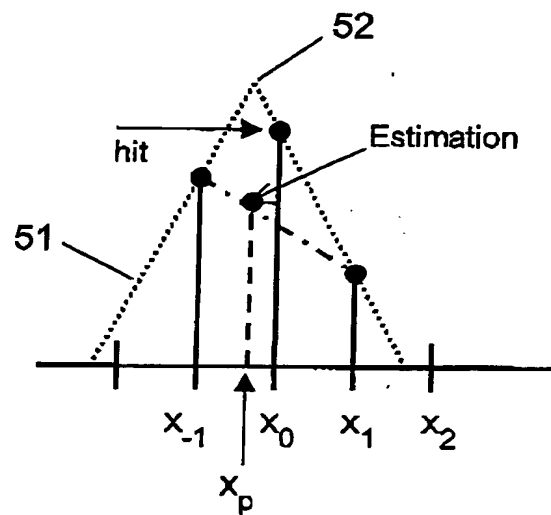


FIG. 1

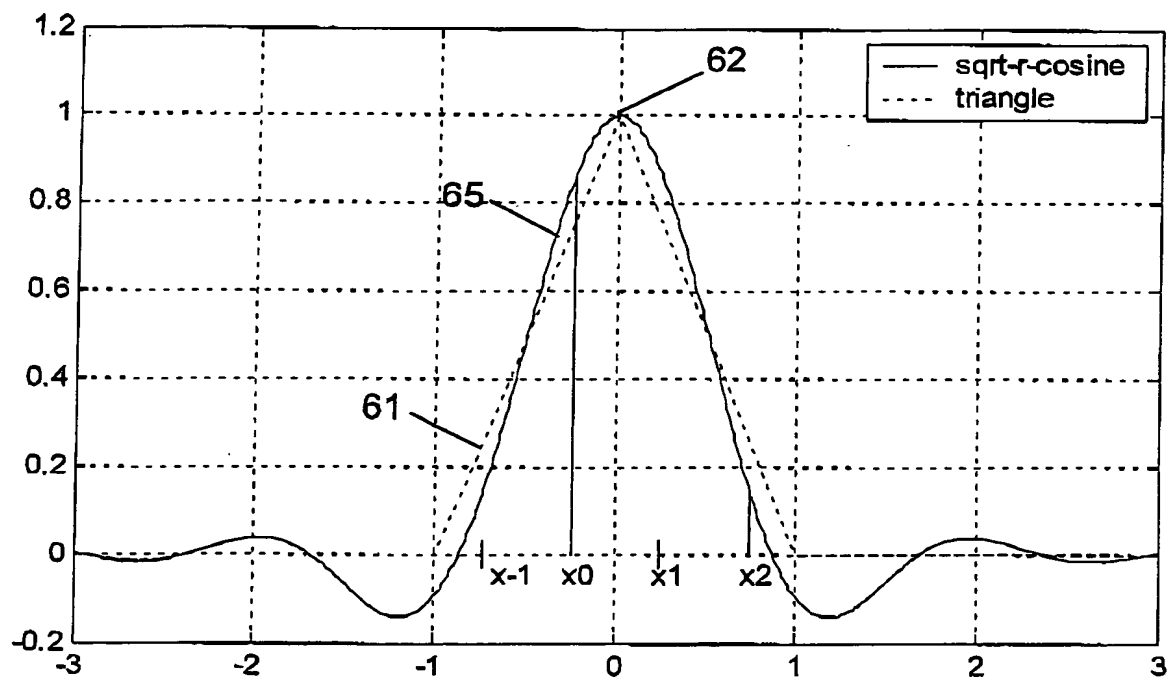
2/4

**FIG. 2****FIG. 3**

3/4

**FIG. 4****FIG. 5**

4/4

**FIG. 6**